


Dimensions

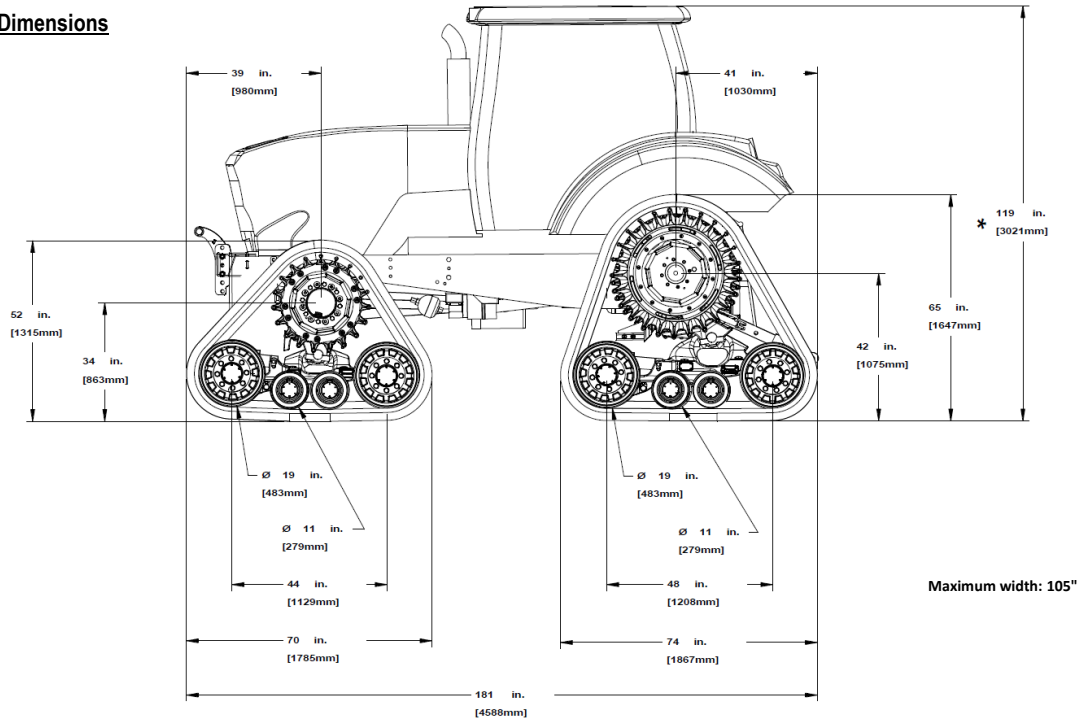

Maximum width: 105"

Compatibility

- Compatible with models from most major tractor brands from 100 to 140 hp
- Compatible with front snow blade, track claws, ice studs, and most tractor attachments

Features (standard)

- Front track width: 25" Rear track width: 25"
- Rear pair of midroller axles on walking tandem (rear undercarriage only)
- Hydraulic tensioner with nitrogen accumulator
- Oil bath hubs with cassette seal
- UHMW plastic midrollers and idler wheels
- Front brackets and rear subframe transfer load from undercarriage to tractor frame

Load & speed rating

- Maximum transport speed: up to 21.9 mph (35 km/h) with 31 mph transmission
- Maximum transport load: up to 23 500 lb (15 000 kg) if tractor allows

Maintenance

- Zero daily or weekly maintenance required. Annual oil change on wheel hubs

Benefits

- Increased traction: new track design for ultimate traction in difficult conditions
- Clean design: less snow, ice, mud and debris accumulation on chassis
- Increase uptime thanks to reduced maintenance and cleaning



- Complete track system weight – including brackets: S-TECH 600G 25": 10 234 lb (4 644 kg)


Shipping (for reference only – do not quote transport based on this information)

- Total shipping weight: approximately 12 000 lb (5 450 kg)
- Packaging:
 - 3 crates 77" x 63" x 30"
 - 1 crate 71" x 41" x 31"
 - 1 crate 52" x 41" x 18"
 - 2 skids 90" x 50" x 26"
 - 1 skid 90" x 60" x 31"

Installation

- Installation time: approximately 16 man-hours (minimum 2 persons recommended for easy installation).
- Bracket can be left on tractor when reinstalling tires if required.
- No modification (welding, cutting, etc.) required on tractor. Removing some specific types of attachments may be required.
- No specialized tools or lifting equipment required.

Dimensions

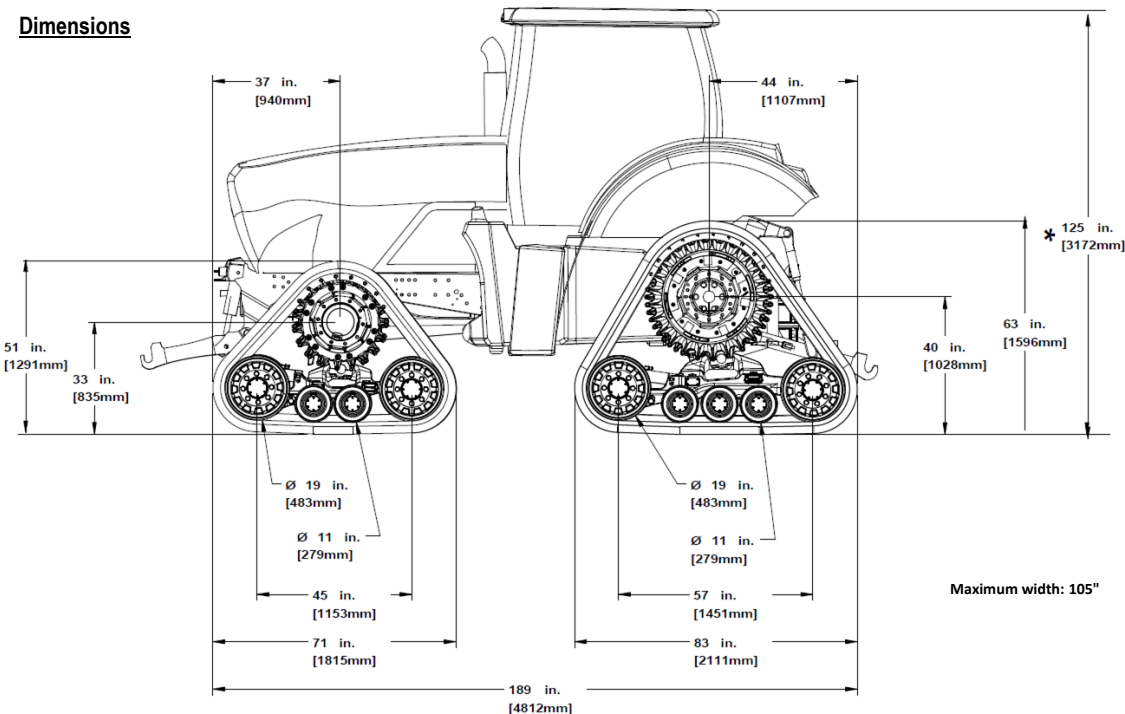

Maximum width: 105"

Compatibility

- Compatible with models from most major tractor brands from 140 to 175 hp
- Compatible with front snow blade, track claws, ice studs, and most tractor attachments

Features (standard)

- Front track width: 25" Rear track width: 25"
- Rear pair of midroller axles on walking tandem (rear undercarriage only)
- Hydraulic tensioner with nitrogen accumulator
- Oil bath hubs with cassette seal
- UHMW plastic midrollers and idler wheels
- Front brackets and rear subframe transfer load from undercarriage to tractor frame

Load & speed rating

- Maximum transport speed: up to 21.9 mph (35 km/h) with 31 mph transmission
- Maximum transport load: up to 23 500 lb (15 000 kg) if tractor allows

Maintenance

- Zero daily or weekly maintenance required. Annual oil change on wheel hubs

Benefits

- Increased traction: new track design for ultimate traction in difficult conditions
- Clean design: less snow, ice, mud and debris accumulation on chassis
- Increase uptime thanks to reduced maintenance and cleaning



- Complete track system weight – including brackets: S-TECH 600GX 25": 10 492 lb (4 760 kg)

Shipping (for reference only – do not quote transport based on this information)

- Total shipping weight: approximately 12 000 lb (5 450 kg)
- Packaging:
 - 3 crates 77" x 63" x 30"
 - 1 crate 71" x 41" x 31"
 - 1 crate 52" x 41" x 18"
 - 2 skids 90" x 50" x 26"
 - 1 skid 90" x 60" x 31"

Installation

- Installation time: approximately 16 man-hours (minimum 2 persons recommended for easy installation).
- Bracket can be left on tractor when reinstalling tires if required.
- No modification (welding, cutting, etc.) required on tractor. Removing some specific types of attachments may be required.
- No specialized tools or lifting equipment required.